



REWIND[®]

CONTRACT 900 BRL



TECHNICAL DATA	TECHNISCHE DATEN	FICHE TECHNIQUE		
Manufacturing process	Herstellungsart	Méthode de fabrication	DIN 61151	Needle felt
Surface structure	Oberflächenstruktur	Aspect de surface	-	Braille
Pile material	Polmaterial	Composition des fibres	-	100% polypropylene
Pile weight Total weight	Polgewicht Gesamtgewicht	Poids des fibres Poids total	ISO 8543	900 g/m ²
Roll length	Rollenlänge	Longueur rouleau	-	30 m
Backing	Rückenbeschichtung	Dossier	ISO 2424	None - latex free
Pile height	Polhöhe	Hauteur du velours	ISO 1765	3,5 mm
Total height	Gesamthöhe	Hauteur totale	ISO 1765	7,7 mm
Permanent anti-static	Permanent antistatisch	Antistatique permanent	ISO 6356	≤ 2kV
Fire Classification	Brennklasse	Comportement au feu	EN 13501-1	Bfl-s1
Thermal resistance	Thermische Beständigkeit	Résistance thermique	ISO 8302	0,1233 m ² K/W
Impact noise reduction	Trittschallminderung	Réduction du bruit d'impact		23 dB
Resistance to rubbing	Reibechtheit	Résistance au frottement	ISO 105X12	≥ 5
Prodis GUT Certificate	Prodis GUT Zertifikat	Certificat Prodis GUT	-	



CONTACT


rewind@bintg.com
www.rewindcarpet.com

A BRAND OF
**Beulieu
International
Group**



REWIND® 900 BRL

COLOUR NAME		2M	4M
1098	PEBBLE	✓	✓
2077	CARBON	✓	✓
2158	STORM GREY	✓	✓
2190	ANTHRACITE	✓	✓
2225	STEEL GREY	✓	✓
2241	SILVER	✓	✓
2266	CHARCOAL	✓	✓
3088	RUBY RED	✓	✓
5100	MIDNIGHT	✓	✓
5131	NILE BLUE	✓	✓
5151	JEANS	✓	✓
6099	FOREST	✓	✓
6125	DARK OLIVE	✓	✓
7001	FOX	✓	✓
7055	DESERT	✓	✓
7104	DEEP BROWN	✓	✓

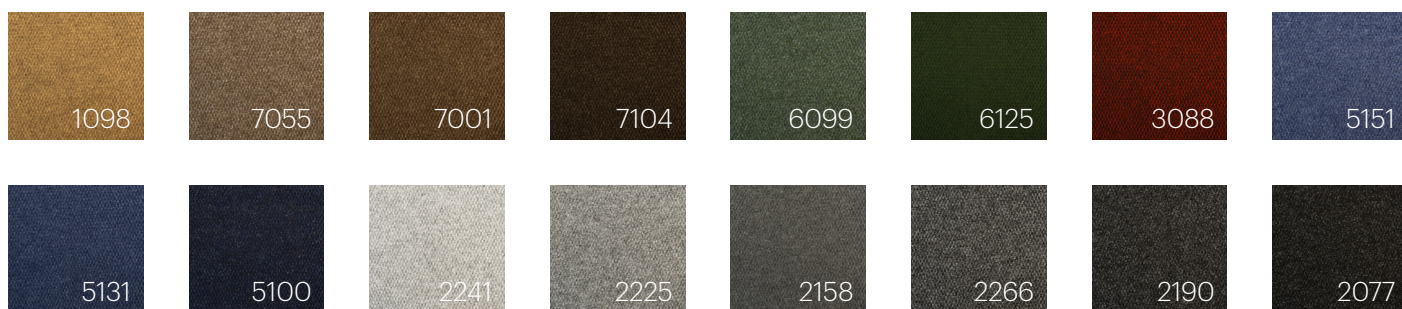

Colours may slightly vary from batch to batch. Characteristics in line with EN 1307 standards.
 We reserve the right to alter technical specifications. Protection foil is not suitable in humid conditions.
 © Beaulieu International Group