



REWIND®

CONTRACT 900 DILOUR



TECHNICAL DATA	TECHNISCHE DATEN	FICHE TECHNIQUE		
Manufacturing process	Herstellungsart	Méthode de fabrication	DIN 61151	Needle felt
Surface structure	Oberflächenstruktur	Aspect de surface	-	Dilour
Pile material	Polmaterial	Composition des fibres	-	100% polypropylene
Pile weight Total weight	Polgewicht Gesamtgewicht	Poids des fibres Poids total	ISO 8543	900 g/m ²
Roll length	Rollenlänge	Longueur rouleau	-	30 m
Backing	Rückenbeschichtung	Dossier	ISO 2424	None - latex free
Pile height	Polhöhe	Hauteur du velours	ISO 1765	5 mm
Total height	Gesamthöhe	Hauteur totale	ISO 1765	8,6 mm
Permanent anti-static	Permanent antistatisch	Antistatique permanent	ISO 6356	≤ 2kV
Fire Classification	Brennklasse	Comportement au feu	EN 13501-1	Bfl-s1
Thermal resistance	Thermische Beständigkeit	Résistance thermique	ISO 8302	0,1298 m ² K/W
Impact noise reduction	Trittschallminderung	Réduction du bruit d'impact		24 dB
Resistance to rubbing	Reibechtheit	Résistance au frottement	ISO 105X12	≥ 5
Prodis GUT Certificate	Prodis GUT Zertifikat	Certificat Prodis GUT	-	

CONTACT


rewind@bintg.com
www.rewindcarpet.com

A BRAND OF
**Beulieu
International
Group**



REWIND® 900 DILOUR

COLOUR NAME	2M	4M
1098 PEBBLE	✓	✓
2077 CARBON	✓	✓
2158 STORM GREY	✓	✓
2190 ANTHRACITE*	✓	✓
2225 STEEL GREY	✓	✓
2241 SILVER	✓	✓
2266 CHARCOAL*	✓	✓
3088 RUBY RED	✓	✓
5100 MIDNIGHT*	✓	✓
5131 NILE BLUE	✓	✓
5151 JEANS	✓	✓
6099 FOREST	✓	✓
6125 DARK OLIVE	✓	✓
7001 FOX	✓	✓
7055 DESERT*	✓	✓
7104 DEEP BROWN	✓	✓

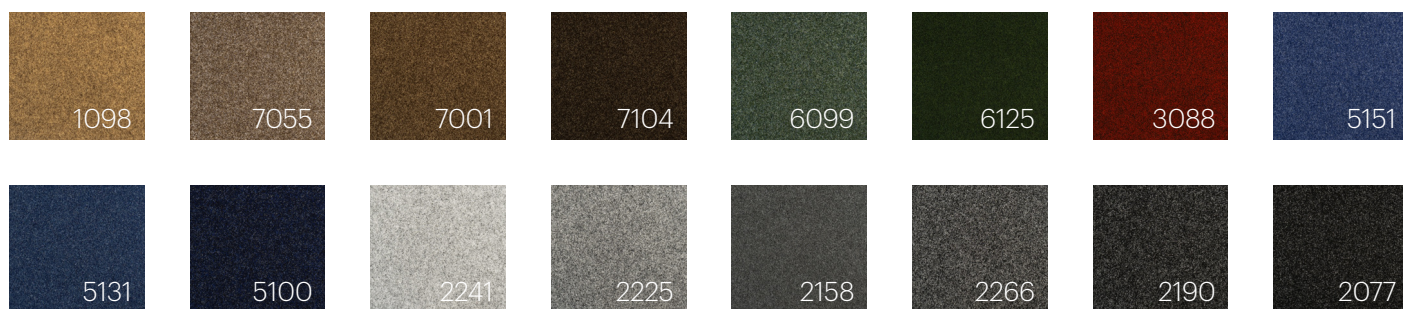

Colours may slightly vary from batch to batch. Characteristics in line with EN 1307 standards.
 We reserve the right to alter technical specifications. Protection foil is not suitable in humid conditions.
 © Beaulieu International Group

DNF.RO.MAR.15b/2/15-2-22